

**Circuit v1.8**

**New Features User Guide**

# CONTENTS

New features in Circuit version 1.8 .....	3
Non-quantised record.....	3
Synth microstep edit.....	4
Per-note velocity.....	6
Assignable MIDI channels.....	7



## New features in Circuit version 1.8

### 1. Non-quantised record

It is now possible to live record directly to microsteps for both synth and drum tracks.

To toggle quantised recording on/off press **shift + record** in any view.

The record button will be brightly lit when quantisation is enabled, and dimly lit when disabled (non-quantised). This choice will persist through session change and power cycle.

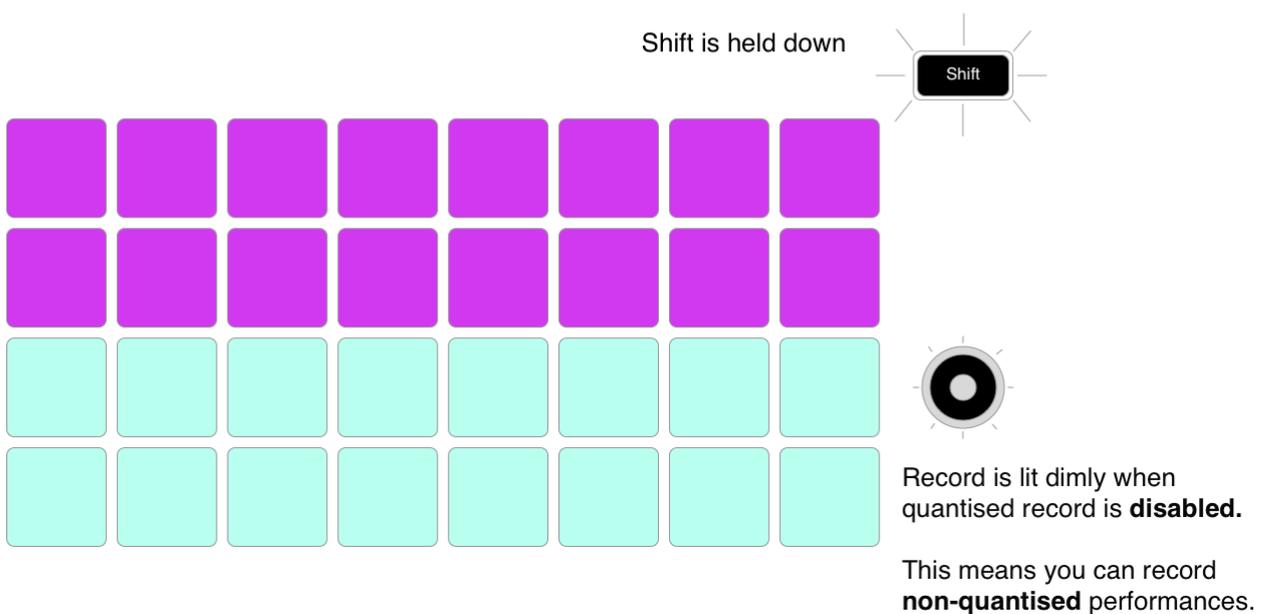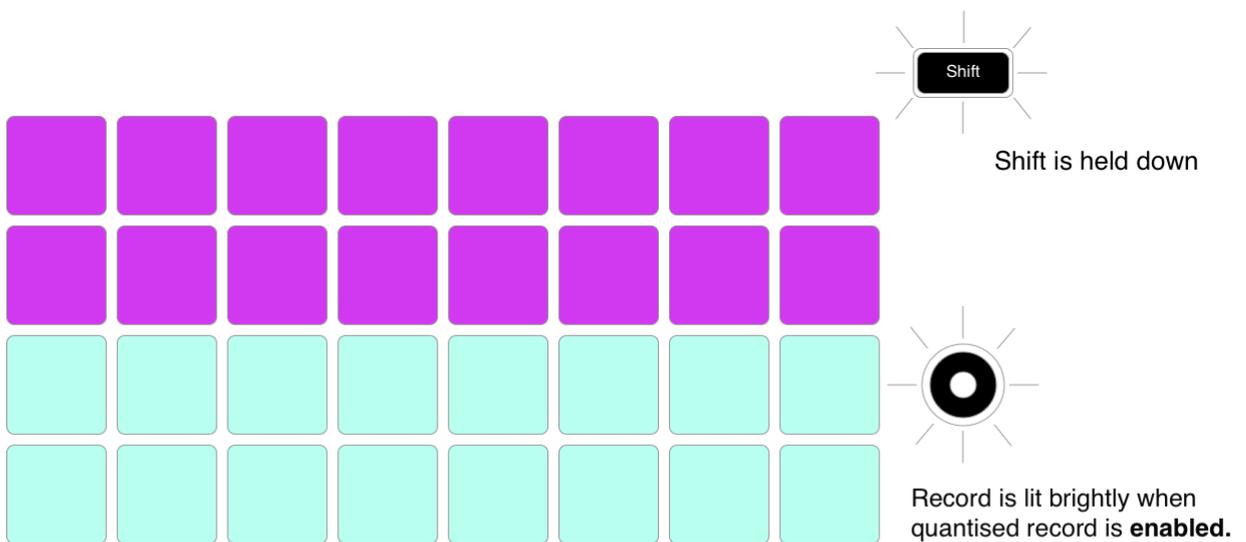


## 2. Synth microstep edit

Along with recording non-quantised patterns, you can now edit the microstep of individual synth notes. This allows the circuit to be used to program more complex and intricate patterns than ever before.

*How it works:*


First press a step with one or more notes assigned to it.

Now, enter gate view and then hold shift to display the microstep menu (seen below).

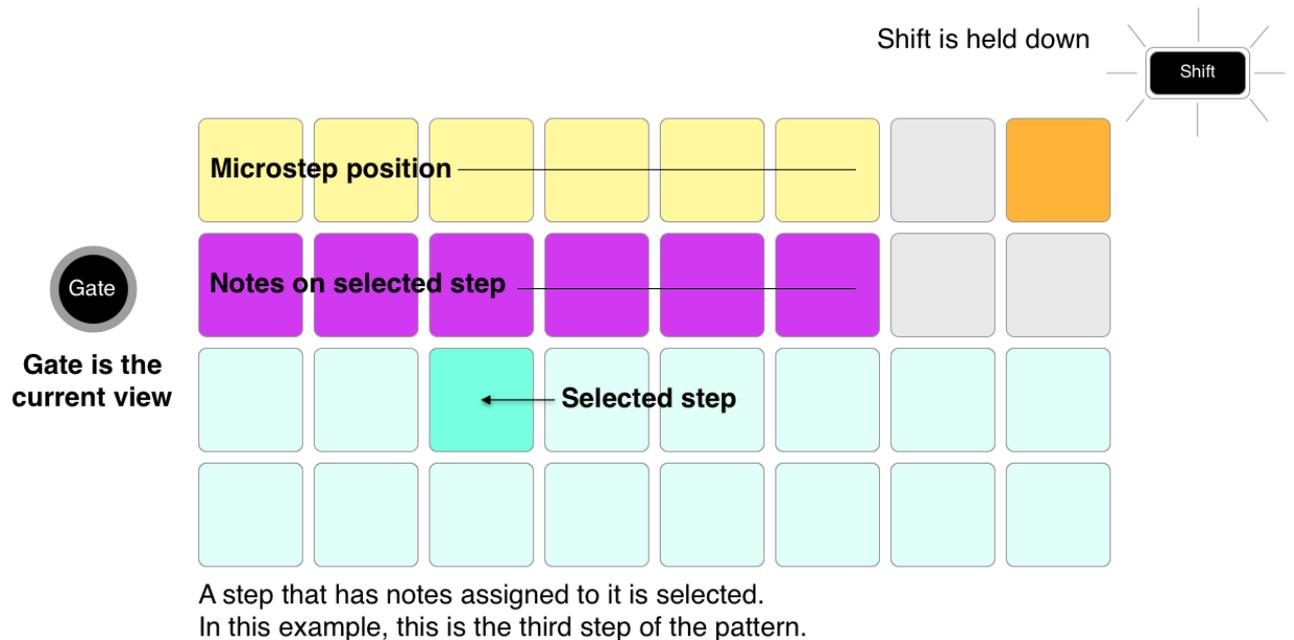

The purple/green pads (Synth 1/Synth 2) represent the notes assigned to the step. Notes are displayed left to right in order of assignment (1<sup>st</sup> note assigned to a step is the leftmost).

Press a purple or green pad to select a note. Selecting a note will also preview it.

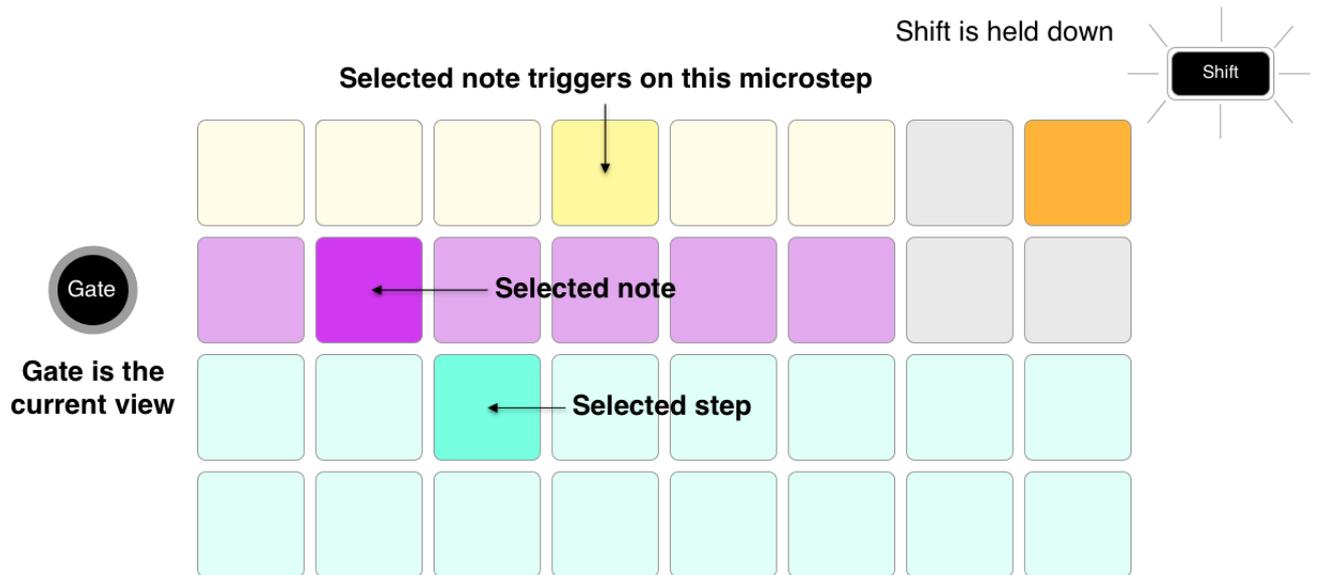

Multiple notes can be selected by simultaneously pressing pads, or by holding down a pad & tapping others. All notes on a step are selected by default before a selection is made.

With your note selected, use the top row of pads to choose the microstep on which the note (or notes) will trigger.

### 3. Per-note velocity

It is now possible to have different velocities assigned to synth notes that occupy a single step.

Additionally, velocity will now be tracked when manually assigning notes to steps (while fixed velocity is disabled).

*How it works:*

#### **Fixed velocity must be disabled.**


Hit a pad with a high velocity and assign it to a step – the velocity value for this note will be saved into the sequencer.

Next, hit a pad with a low velocity into the same step – the velocity value for this note is saved independently of the first.

Previously, notes assigned in this way would have a fixed velocity.

The velocity value for each note can be changed by simply unassigning the chosen note from the step and hitting the pad again with the desired velocity.

The range of velocity values present on a single step can be seen from velocity view. The brightly lit pads represent the lowest velocity value on the step, while the dimly lit pads represent the highest velocity value on the step.

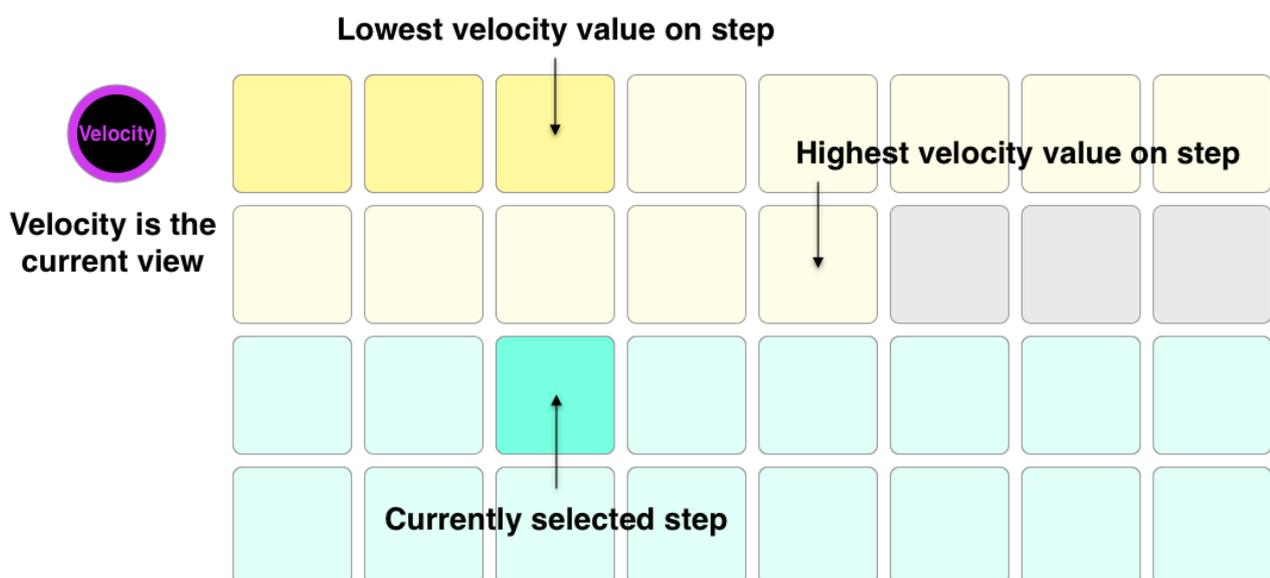

#### 4. Assignable MIDI channels

MIDI channels for each track can now be changed from the setup menu.

Synth 1, Synth 2 and Drum 1/2/3/4 can now be set to MIDI channels 1-15. Channel 16 is reserved for the session.


Drum 1/2/3/4 is a single MIDI track.

*How it works:*

To edit the MIDI channel of each of the three tracks, enter the setup menu by holding shift when powering on Circuit.

Press the track select buttons to select the track you wish to change the channel of (Synth 1, Synth 2, Drum 1/2/3/4).

The top two rows of pads represent the MIDI channels 1-16.

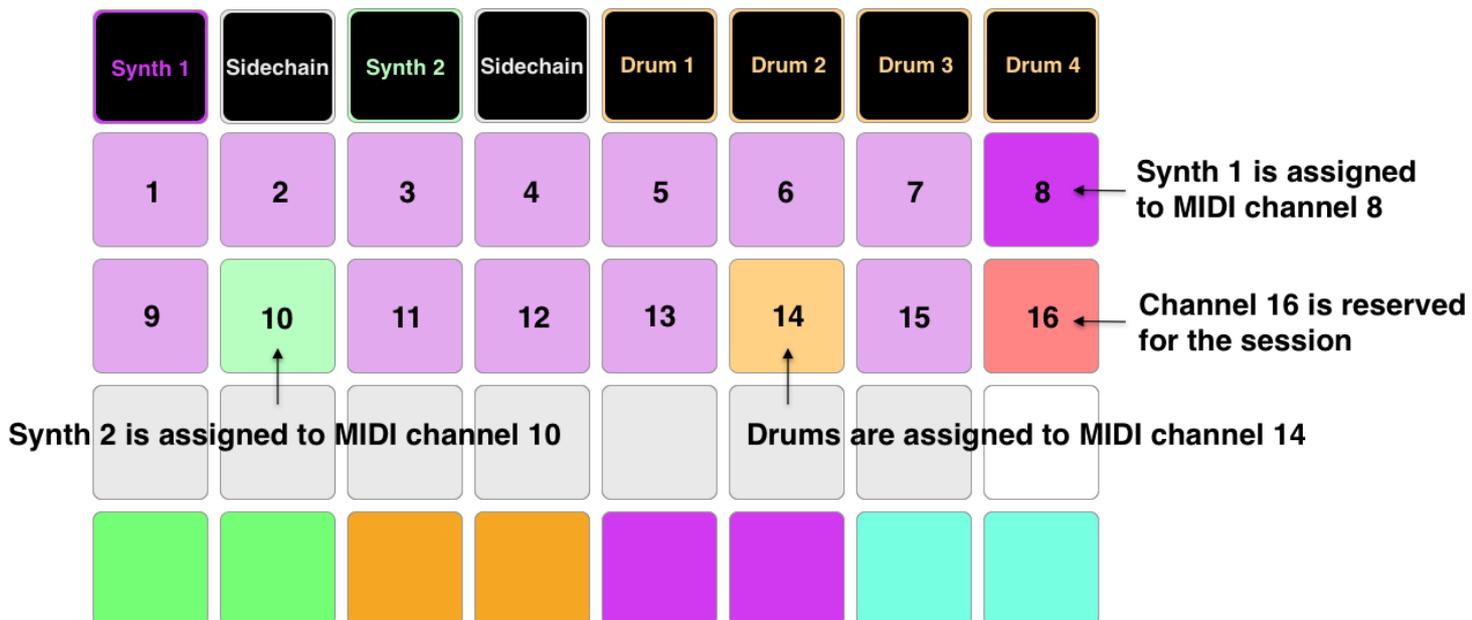

The placement of the purple, green, and orange pads in the top two rows show the MIDI channel each track is currently assigned to.

As with all setup menu changes, press play to save your changes and boot your circuit.