

Introduction

Hear your show in perfect detail with the Vocaster HP60v closed-back studio headphones. The Vocaster HP60v headphones let you hear your show as the world will.

The Vocaster HP60v headphones include:

- A lightweight adjustable cushioned headband for extended listening periods.
- Screw-on 6.35mm stereo jack adaptor to use the Vocaster HP60v headphones with all your devices.
- Wide, smooth frequency range to accurately monitor your recordings.
- Closed-back design to isolate external noise and provide the best conditions for monitoring.

The closed-back design stops your microphone picking up your mix and the comfortable headband means you can tell your stories and produce your show for as long as you like.

Dimensions




Setup

Using the 6.35mm Jack Adaptor

You can use your Vocaster HP60v headphones with most audio devices however not all audio equipment uses the same size headphone connector.

To connect to your Vocaster, or most audio interfaces, you need to use the included 6.35mm jack adaptor. To connect to smaller devices like a laptop or phone you need to remove the 6.35mm jack adaptor by unscrewing it from the headphone cable.

Screw on the 6.35mm jack adaptor clockwise to connect the headphones to your Vocaster or audio interface:

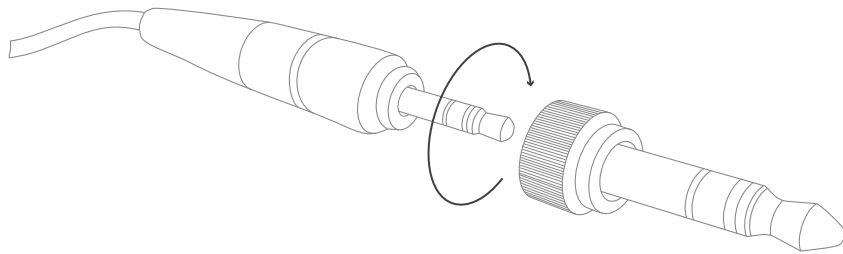

Vocaster HP60v FAQs

The headphone jack is too big/small to fit the headphone output on my device

The Vocaster HP60v headphones include a screw on 6.35mm jack adaptor. For smaller devices like phones and computers you need to unscrew the adaptor (anti-clockwise) to use your headphones.

Can I use the Vocaster HP60v headphones with any device?

Yes, you should be able to use the Vocaster HP60v headphones with almost any device, other interfaces, phones, laptops, mixing consoles and more


Are the Vocaster HP60v headphones on-ear or over-ear headphones?

The Vocaster HP60v headphones are closed-back over-ear headphones.

Specifications

Technical Specifications

Performance	
Impedance	32Ω
Sensitivity	98dB ±3dB
Frequency Response	20Hz - 20kHz
Maximum Power	1.2W

Physical Characteristics	
Loudspeaker Diameter	50mm
Cable Length	3m (approximately)
Connector	3.5mm Stereo Jack 6.35mm screw-on adaptor
Weight (including cable)	288g (10.15 oz)
Magnetic field strength 	<20mT

Accessories and Spare Parts

Part	Part Number
Gold screw-on 6.35mm stereo jack adaptor - HP60v	MISC002200
Single ear cushion (left or right) - HP60v	MISC002201

To get spares for your Vocaster HP60v headphones please either contact our Spares team or speak to your local distributor:

Contact our Spares Team: support.focusrite.com

Contact your local distributor: stockists.focusrite.com

Authored by Ed Fry

